


# ISO - quick<sup>®</sup> Kappenisolierung

## Technische Daten:

Material:	Polyurethan-Hartschaum schwarz eingefärbt
Raumgewicht:	ca. 120 Kg / m <sup>3</sup>
Temperaturbeständigkeit:	von -180°C bis +100°C
Wärmeleitfähigkeit:	$\lambda = 0,035$ W/mK nach DIN 4108
Wasseraufnahme:	0,6 % Vol.
Brandklasse:	B2 nach DIN 4102

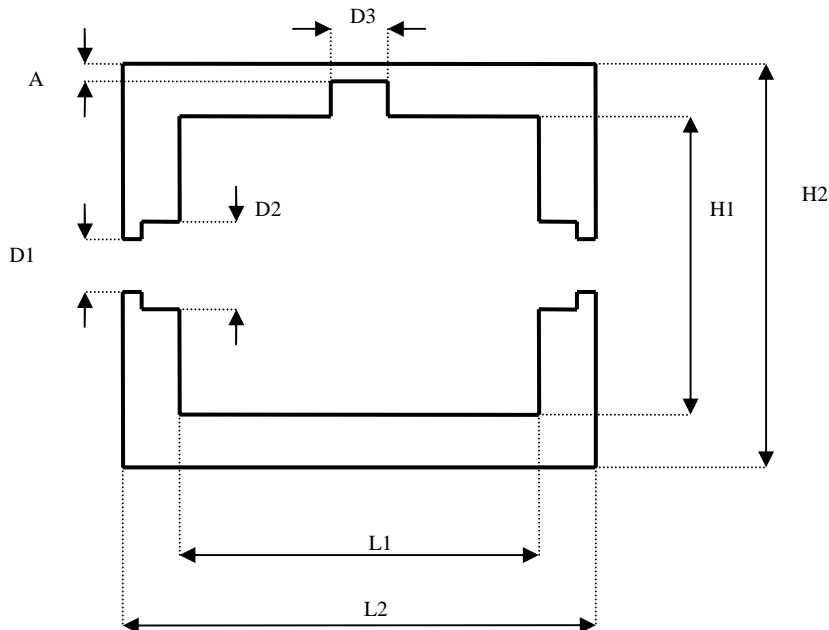

Art.-Nr	DN	Zoll	L1	L2	ØH1	ØH2	ØD1	ØD2	ØD3	A	
			mm	mm	mm	mm	mm	mm	mm	mm	
1-242025	20	3/4"	120	160	120	160	27	34	40	10	
1-242025	25	1"	120	160	120	160	27	34	40	10	
1-243240	32	1 1/4"	123	175	153	205	42	47	40	9	
1-243240	40	1 1/2"	123	175	153	205	42	47	40	9	
1-240050	50	2"	140	200	170	230	-	61	40	10	
1-240065	65	2 1/2"	145	215	190	260	-	77	40	10	
1-240080	80	3"	155	235	210	290	-	89	40	10	
1-240100	100	4"	165	255	225	315	-	115	40	10	
1-240125	125	5"	175	265	255	345	-	140	40	10	
1-240150	150	6"	180	270	290	380	-	166	50	10	
1-240200	200	8"	200	290	350	440	-	219	80	10	